



Atomizing Spray Nozzles

All stainless steel construction for durability and corrosion resistance!

What Are Atomizing Nozzles?

EXAIR's Atomizing Spray Nozzles atomize fluids (most commonly water) in a range of spray patterns for a variety of uses. They combine liquid and compressed air to create a mist of atomized liquid that can be easily adjusted to meet the needs of your application. All models use stainless steel construction for durability and corrosion resistance. Atomizing spray nozzles are available in 1/4 NPT and 1/2 NPT sizes. See pages 66-74 for 1/4 NPT sizes and 75-80 for 1/2 NPT sizes.

EXAIR's atomizing nozzles are available in 3 basic families:

Internal Mix:

Internal mix nozzles mix the liquid and air inside the air cap and produce the finest atomization. Internal mix nozzles can be used on liquids with a viscosity up to 300 cP. Both air and liquid sides are pressure fed.

External Mix:

External mix nozzles have the highest flow rates and allow the air and liquid flows to be adjusted independently. These nozzles are best where precise liquid flow is needed. External mix nozzles can be used on liquids with a viscosity above 300 cP. Both air and liquid sides are pressure fed.

Siphon Fed:

Siphon fed nozzles require no liquid pressure and can be used with gravity fed liquids or liquids from a siphon height as much as 36 inches (91cm). Siphon fed nozzles can be used on liquids with a viscosity up to 200 cP.

Why Atomizing Nozzles?

With EXAIR's atomizing nozzles, you can coat, cool, treat and paint a variety of products. Used with water, they are an efficient way to cool hot items in your automated process. These nozzles are also an excellent choice for dust mitigation.


Sound levels for the individual Atomizing Spray Nozzles are not provided. The fluid, pressure, surfaces being treated and surrounding enclosures used in conjunction with the Atomizing Spray Nozzle to form the system will determine the actual sound levels (which can vary greatly). Max temperature is 400°F (204°C) for Atomizing Spray Nozzles. All atomizing nozzles are CE compliant.

Applications

- Washing
- Rinsing
- Coating
- Cooling
- Quenching
- Wetting (moistening)
- Humidification
- Dust Control

Advantages

- Fully adjustable
- Maximizes liquid dispersion
- Minimizes liquid consumption
- All stainless steel construction
- Compact
- Versatile
- Interchangeable liquid and air caps
- Minimizes air consumption
- Fine atomization



A Model AN1010SS Internal Mix Narrow Angle Round Atomizing Nozzle is used to mark strips of steel before they leave the mill.



A Model SR1010SS is used to supply a cooling mist for a drilling operation.



(2) Model EB1030SS atomizing nozzles are used to give a final sanitary rinse prior to labeling wine bottles.



Mounting Brackets are available - Model 901318 for 1/4 NPT and Model 901556 for 1/2 NPT atomizing nozzles.

For more information about droplet size and spray angle, see page 84.

Spray Nozzles

Atomizing Nozzles



Internal Mix Narrow Angle Round Pattern - 1/4 NPT

Model AN1010SS, AN1020SS, AN1030SS, and AN1040SS



Model: AN1010SS
Material: Type 303 Stainless Steel

1/4 NPT internal mix narrow angle round pattern nozzles are excellent for spraying a concentrated mist of liquid. Because of the versatility of their adjustments, they can apply a heavy coat up close or send a very fine mist over 30 feet away! They are often used for precision application of lubricants during assembly, or marking items as they move through an assembly line. Narrow angle round pattern atomizing nozzles are capable of delivering the most liquid of any of our 1/4 NPT internal mix atomizing nozzles.

For pressure fed applications not requiring independent air and liquid control.



Model: AN1020SS
Material: Type 303 Stainless Steel



The amount of liquid applied can be greatly varied by adjusting the valve or inlet pressures.




Model: AN1030SS
Material: Type 303 Stainless Steel



Model: AN1040SS
Material: Type 303 Stainless Steel

Dimensions and Airflow Pattern

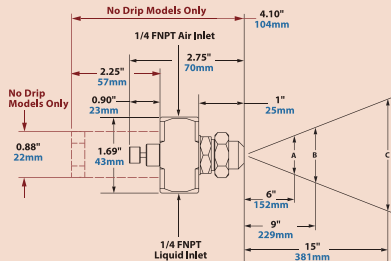

No Drip Only Dimensions in Red See page 81 for No Drip Atomizing Nozzles

For more information about droplet size and spray angle, see page 84.

Model	10 PSI/0.7 BAR Liquid			20 PSI/1.4 BAR Liquid			30 PSI/2.1 BAR Liquid			40 PSI/2.8 BAR Liquid			60 PSI/4.1 BAR Liquid			Spray Dimensions																												
	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	Liquid PSI/BAR	A	B	C	Max. Depth feet/m																							
AN1010SS	10	0.7	1.4	5.3	0.6	17	18	1.2	1.8	6.8	0.9	25	24	1.7	2.3	8.7	1.0	28	30	2.1	2.7	10.2	1.2	34	40	2.8	3.3	12.5	1.5	42	12	0.8	1.0	0.7	2.3	6	3.3	8	5.0	13	6	1.8		
	20	1.4	2.8	1.0	1.2	4.5	0.7	20	22	1.5	1.6	6.1	1.0	28	32	2.2	1.9	7.2	1.3	37	38	2.6	2.3	8.7	1.5	42	52	3.6	2.8	10.6	1.9	54	20	1.4	2.0	1.4	2.8	7	3.8	10	6.0	15	8	2.4
	30	1.4	2.8	1.0	1.2	4.5	0.7	20	24	1.7	1.5	5.7	1.1	31	36	2.5	1.6	6.1	1.5	42	44	3.0	1.9	7.2	1.7	48	62	4.3	2.3	8.7	2.4	68	42	2.9	4.0	2.8	3.5	9	4.5	11	6.5	17	9	2.7
	40	1.4	2.8	1.0	1.2	4.5	0.7	20	26	1.8	1.3	4.9	1.2	34	40	2.8	1.3	4.9	1.7	48	48	3.3	1.7	6.4	2.0	57	70	4.8	1.9	7.2	2.8	79	58	4.0	6.0	4.1	4.0	5.0	13	7.0	18	11	3.4	
AN1020SS	10	1.1	3.7	14.0	2.8	79	28	1.9	5.2	19.7	4.0	113	40	2.8	6.0	22.7	5.2	147	48	3.3	7.0	26.5	5.9	167	65	4.5	9.9	37.5	7.0	198	38	17	10	0.7	2.5	6	3.5	9	5.5	14	11	3.4		
	20	1.4	2.5	9.5	3.4	96	36	2.5	2.7	10.2	5.1	144	48	3.3	3.8	14.4	6.4	181	65	4.5	3.6	13.6	8.1	229	80	5.5	6.5	26.0	8.6	244	34	2.3	3.0	2.1	3.8	10	8	4.3	11	6.5	17	9	2.7	
	30	1.4	2.5	9.5	3.4	96	40	2.8	1.7	6.4	5.7	161	55	3.8	2.1	7.9	7.3	207	75	5.2	1.4	5.3	9.8	277	90	6.2	4.5	17.0	10.1	1286	42	2.9	6.6	0.2	250	2.7	76	42	2.9	6.6	0.2	250	2.7	76
	40	1.4	2.5	9.5	3.4	96	28	1.9	5.2	19.7	4.0	113	60	4.1	1.1	4.2	8.1	229	80	5.5	0.8	3.0	10.2	289	100	6.9	2.4	9.1	11	3320	70	4.8	6.0	4.1	4.0	5.0	13	7.0	18	11	3.4			
AN1030SS	10	0.8	7.8	29.5	1.9	54	20	1.4	12.9	48.8	2.5	71	30	2.1	15.1	57.2	3.4	96	38	2.6	18.0	68.1	4.1	116	54	3.7	23.0	87.1	5.3	150	16	1.0	0.7	2.8	7	4.5	11	6.5	17	10	3.0			
	20	1.0	6.0	22.7	2.2	62	24	1.7	9.8	37.1	3.0	85	38	2.6	9.4	35.6	4.5	127	46	3.2	13.1	49.6	5.1	144	65	4.5	17.1	64.7	6.7	190	40	2.8	3.0	2.1	3.8	1.0	5.5	14	8.0	20	18	5.8		
	30	1.1	4.4	16.7	2.6	74	28	1.9	7.0	26.5	3.6	102	42	2.9	7.0	26.5	5.1	144	52	3.6	9.6	36.3	6.0	170	75	5.2	12.3	46.6	8.0	227	50	3.4	4.0	2.8	4.0	1.0	6.0	15	8.0	20	22	6.7		
	40	1.2	3.3	12.5	2.9	82	32	2.2	4.1	15.5	4.4	125	46	3.2	5.0	18.9	5.9	167	56	3.9	7.3	27.6	6.6	187	85	5.9	7.3	27.6	9.6	272	70	4.8	6.0	4.1	4.0	1.0	6.0	15	8.0	20	26	7.9		
AN1040SS	10	1.0	6.3	23.8	3.5	99	24	1.7	14.0	49.0	8.0	85	28	1.9	33.0	125	3.4	96	32	2.2	46.5	176	2.8	79	42	2.9	66.0	250	2.7	76	14	1.0	0.7	3.0	8	4.5	11	6.5	17	10	3.0			
	20	1.1	3.0	11.4	4.2	119	24	1.7	13.0	49.2	4.2	119	32	2.2	24.0	90.8	4.6	130	40	2.8	30.0	114	5.1	144	50	3.4	34.0	204.3	4.3	123	24	1.7	2.0	1.4	3.5	9	6.0	15	7.5	19	21	6.4		
	30	1.1	3.0	11.4	4.2	119	26	1.8	9.0	34.1	4.9	139	36	2.5	12.5	47.3	5.9	167	46	3.2	16.5	62.5	6.8	193	58	4.0	19.0	148	6.6	187	44	3.0	4.0	2.8	4.5	1.0	7.0	18	8.5	22	30	9.1		
	40	1.1	3.0	11.4	4.2	119	28	1.9	5.5	20.8	5.6	159	40	2.8	6.0	22.7	7.4	210	50	3.4	10.3	39.0	8.2	232	70	4.8	15.8	60	10.2	289	64	4.4	6.0	4.1	5.0	13	7.0	18	9.0	23	35	10.7		





Internal Mix Wide Angle Round Pattern - 1/4 NPT

Model AW1010SS, AW1020SS, AW1030SS, and AW1040SS

EXAIR's 1/4 NPT internal mix wide angle round pattern atomizing nozzles are great for covering a broad area. They can be adjusted for a light mist or a heavy soaking spray. They are popular for dust mitigation, humidification, and cooling of products, people or livestock in a broad area. These nozzles are also perfect for applying a coating to parts packed in large containers, for example, misting a container of stamped steel parts with oil to prevent oxidation during shipment.

For pressure fed applications not requiring independent air and liquid control.



Model: AW1010SS
Material: Type 303 Stainless Steel



Model: AW1020SS
Material: Type 303 Stainless Steel



Model: AW1030SS
Material: Type 303 Stainless Steel




Model: AW1040SS
Material: Type 303 Stainless Steel



A model AW1030SS is used to keep dust down during charcoal briquette production.

Dimensions and Air Flow Pattern

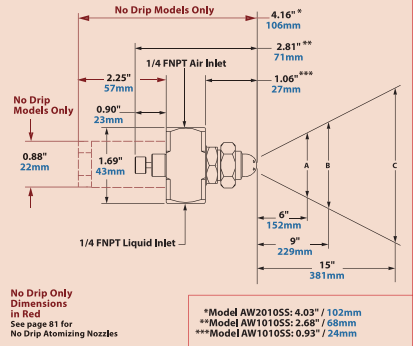

For more information about droplet size and spray angle, see page 84.

Spray Nozzles

Model	10 PSI/0.7 BAR Liquid			20 PSI/1.4 BAR Liquid			30 PSI/2.1 BAR Liquid			40 PSI/2.8 BAR Liquid			60 PSI/4.1 BAR Liquid			Spray Dimensions					Max. Depth feet/m																								
	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Pressure Air PSI/ BAR	Liquid PSI/BAR	A in	B in	C in																									
AW1010SS	8	0.6	1.8	6.8	0.3	8	14	1.0	2.4	9.1	0.4	11	22	1.5	2.7	10.2	0.5	14	30	2.1	3.0	11.4	0.7	20	44	3.0	3.5	13.2	0.9	25	10	0.7	10	0.7	7	18	9	23	14	36	5	1.5			
	10	0.7	1.6	6.1	0.4	11	18	1.2	2.1	7.9	0.5	14	30	2.1	2.3	8.7	0.7	20	38	2.6	2.6	9.8	0.8	23	55	3.8	3.1	11.7	1.1	31	20	1.4	2.0	1.4	9	23	11	25	12	30	16	41	6	1.8	
	12	0.8	1.5	5.7	0.4	11	22	1.5	1.9	7.2	0.6	17	36	2.5	1.9	7.2	0.8	23	46	3.2	2.1	7.9	1.0	28	65	4.5	2.5	9.5	1.3	37	42	2.9	4.0	2.8	10	25	12	30	16	41	9	2.7			
	14	1.0	1.3	4.9	0.5	14	26	1.8	1.6	6.1	0.7	20	40	2.8	1.6	6.1	0.9	25	50	3.4	1.9	7.2	1.1	31	75	5.2	2.1	7.9	1.5	42	60	4.1	6.0	4.1	11	28	14	36	19	48	14	3.7			
AW1020SS	12	0.8	2.8	10.6	1.7	48	22	1.5	4.0	15.1	2.3	65	30	2.1	5.4	20.4	2.5	71	38	2.6	6.4	24.2	2.9	82	54	3.7	8.5	32.2	3.5	99	12	0.8	10	10	0.7	10	0.7	7	18	9	23	14	36	5	1.5
	14	1.0	1.6	6.1	2.0	57	24	1.7	3.1	11.7	2.5	71	34	2.3	3.8	14.4	3.2	91	44	3.0	4.4	16.7	3.9	101	58	4.0	7.0	26.5	4.1	116	34	2.3	3.0	2.1	11	28	13	33	18	46	11	3.4			
	16	1.2	1.8	6.8	2.3	66	26	1.8	2.0	7.6	2.9	82	38	2.6	1.8	6.8	4.0	113	48	3.3	2.6	9.8	4.6	130	65	4.5	5.4	20.4	5.2	147	46	3.2	4.0	2.8	11	28	14	36	18	46	12	3.7			
	18	1.4	2.0	7.6	2.9	82	30	2.1	0.9	3.4	4.5	127	52	3.6	1.0	3.8	5.4	153	75	5.2	1.7	6.4	7.1	201	60	4.1	6.0	4.1	11	28	14	36	19	48	14	36	19	48	14	36	19	48	14	3.7	
AW1030SS	10	0.7	1.6	6.1	1.1	31	20	1.4	8.5	32.2	1.5	42	30	2.1	0.9	3.4	2.0	57	40	2.8	10.0	37.9	2.6	74	56	3.9	15.0	56.6	8.2	99	12	0.8	10	0.7	10	0.7	7	18	9	23	14	36	5	1.5	
	12	0.8	1.5	5.7	1.4	40	22	1.5	6.0	22.7	1.9	54	34	2.3	5.8	22.0	2.8	79	44	3.0	7.0	26.5	3.4	96	60	4.1	12.0	45.4	3.5	99	34	2.3	3.0	2.1	11	28	14	36	19	48	14	3.7			
	14	1.0	2.2	8.3	1.9	54	24	1.7	4.5	17.0	2.3	65	38	2.6	2.4	9.1	3.8	108	48	3.3	3.7	14.0	4.2	119	70	4.8	5.0	18.9	5.6	159	46	3.2	4.0	2.8	11	28	14	36	19	48	13	4.0			
	16	1.2	1.8	6.8	2.3	66	26	1.8	2.6	9.8	2.7	76	40	2.8	1.4	5.3	4.3	122	52	3.6	1.5	5.7	5.2	147	80	5.5	0.8	3.0	7.7	218	65	4.5	6.0	4.1	11	28	14	36	20	51	19	5.8			
AW1040SS	14	1.7	6.0	22.7	5.4	153	38	2.6	9.3	35.2	7.7	218	48	3.3	15.5	58.7	8.4	238	60	4.1	19.3	73.1	10.3	292	85	5.9	24.0	91.0	13.8	391	65	4.5	10	10	0.7	10	0.7	7	18	9	23	14	36	16	41
	28	1.9	4.0	15.1	6.1	173	44	3.0	5.5	20.8	9.1	258	56	3.9	9.0	34.1	10.6	300	70	4.8	12.0	45.4	12.8	362	90	6.2	21.3	80.6	15.2	430	66	4.3	2.0	1.4	11	28	14	36	18	46	11	3.4			
	30	2.1	2.5	9.5	6.7	190	48	3.3	3.5	13.2	10.0	283	62	4.3	6.0	22.7	12.1	343	80	5.5	6.5	24.6	17.7	416	95	6.6	18.5	70.0	16.5	467	75	5.2	4.0	2.8	12	30	16	41	22	56	24	7.3			
	32	2.2	2.0	7.6	7.3	207	52	3.6	1.9	7.2	10.8	306	70	4.8	2.8	10.6	13.4	379	100	6.2	2.8	10.6	17.2	487	100	6.9	15.8	59.8	17.3	490	90	6.2	6.0	4.1	12	30	16	41	23	58	25	7.6			

Internal Mix Deflected Flat Fan Pattern - 1/4 NPT



Model AD101055


1/4 NPT internal mix deflected flat fan nozzles are designed for applications where space is at a premium. The flat fan pattern sprays at a right angle to the nozzle's orientation, allowing spray to be placed precisely where it's needed in close quarters. These nozzles are ideal for coating the inside of enclosures and ductwork.

Model: AD101055
Material: Type 303 Stainless Steel

For pressure fed applications not requiring independent air and liquid control.



A Model AD101055 is used to apply a protective coating to wood panels.

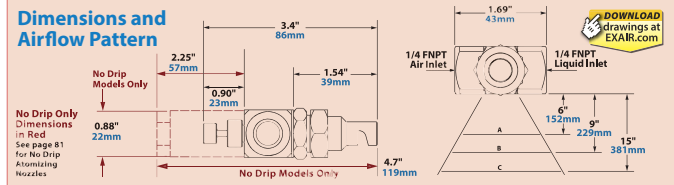

For more information about droplet size and spray angle, see page 84.

Model	10 PSI/0.7 BAR Liquid			20 PSI/1.4 BAR Liquid			30 PSI/2.1 BAR Liquid			40 PSI/2.8 BAR Liquid			60 PSI/4.1 BAR Liquid			Spray Dimensions																										
	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Pressure Air PSI/ Liquid PSI/BAR	Width A in cm	B in cm	C in cm	Max. Depth in cm																						
	AD101055	6	0.4	3.0	11.5	1.4	4.1	14	1.0	4.0	15.1	2.3	6.6	22	1.5	4.6	17.6	3.2	9.0	26	1.8	5.7	21.4	3.5	9.8	38	2.6	6.9	26.0	4.7	13.3	22	1.0	0.7	9	23	14	36	16	41	36	91
	8	0.6	2.7	10.1	1.8	5.0	18	1.2	3.3	12.4	2.9	8.2	26	2.1	4.1	15.4	3.7	10.5	32	2.2	4.9	18.6	4.3	12.1	54	3.7	5.3	20.1	6.6	18.8	22	1.5	2.0	1.4	11	28	13	33	16	41	42	107
	10	0.7	2.2	8.3	2.1	5.9	20	1.4	2.9	11.0	3.2	9.1	30	2.8	4.2	15.7	5.1	14.4	42	3.8	2.6	4.2	15.7	5.1	14.4	64	3.2	4.0	2.8	9	23	12	30	16	41	45	114					
	12	0.8	1.8	6.9	2.4	6.9	22	1.5	2.3	8.9	3.6	10.1	34	2.3	2.8	10.4	5.0	14.0	46	3.2	2.7	10.3	6.3	18.0	70	4.8	3.1	11.9	9.1	25.8	70	4.8	6.0	4.1	12	30	15	38	18	46	42	107

Internal Mix 360° Hollow Circular Pattern - 1/4 NPT




Model AT101055


1/4 NPT internal mix 360° nozzles are designed for applications where the spray pattern must be oriented away from the nozzle in all directions. 360° nozzles are ideal where a smooth, even coating is needed on the ID of pipe or similar ductwork. They also work great for operations where a mist over a broad area is needed, such as dust suppression, humidification and cooling.

Model: AT101055
Material: Type 303 Stainless Steel

For pressure fed applications not requiring independent air and liquid control.



This 360° circular pattern nozzle can be used to coat inside diameters or cover a broad area of over 4' (1219mm).

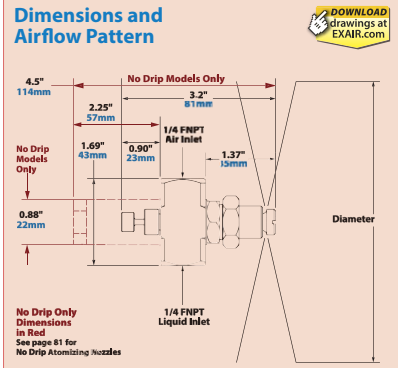

For more information about droplet size and spray angle, see page 84.

Model	10 PSI/0.7 BAR Liquid			20 PSI/1.4 BAR Liquid			30 PSI/2.1 BAR Liquid			40 PSI/2.8 BAR Liquid			60 PSI/4.1 BAR Liquid			Spray Dimensions																				
	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Pressure Air PSI/ Liquid PSI/BAR	Diameter in cm																			
	AT101055	20	1.4	4.5	16.8	4.3	12.1	34	2.3	7.3	27.5	6.4	18.2	50	3.4	8.1	30.6	8.9	25.1	60	4.1	11.5	43.5	10.0	28.3	85	5.9	14.7	55.7	13.3	37.6	20	1.4	1.0	0.7	36
	24	1.7	2.6	9.7	5.3	15.0	38	2.6	5.2	19.6	7.3	20.6	56	3.9	5.4	20.3	10.0	28.5	70	4.8	7.1	26.8	11.8	33.5	90	6.2	12.7	47.9	14.1	39.8	34	2.3	2.0	1.4	39	99
	26	1.8	2.0	7.5	5.7	16.2	42	2.9	3.6	13.5	8.2	23.1	60	4.1	4.2	15.7	10.7	30.3	80	5.5	4.1	15.4	13.5	38.3	95	6.6	10.6	40.2	14.9	42.3	50	3.4	3.0	2.1	44	112
	28	1.9	1.6	5.9	6.2	17.6	48	3.3	2.1	7.8	9.3	26.4	70	4.8	2.0	7.4	12.6	35.6	90	6.2	2.0	7.7	15.5	43.9	100	6.9	8.9	33.7	15.8	44.9	85	5.9	6.0	4.1	53	135

External Mix Narrow Angle Flat Fan Pattern - 1/4 NPT



Model: EF1010SS
Material: Type 303 Stainless Steel



Model: EF1020SS
Material: Type 303 Stainless Steel



Model: EF1030SS
Material: Type 303 Stainless Steel



Model: EF1040SS
Material: Type 303 Stainless Steel

Model EF1010SS, EF1020SS, EF1030SS and EF1040SS


1/4 NPT external mix narrow angle flat fan pattern nozzles are great where a high volume of liquid is needed over a concentrated area. Since they are external mix, airflow and liquid flow can be controlled independently. External mix narrow angle flat fan pattern nozzles are the best choice where thicker liquids for a heavy coating are needed over a narrow band, such as a paint line.

For pressure fed applications with independent air and liquid control.



A Model EF1020SS is used to supply humidification for a corrosion test chamber.

Dimensions and Airflow Pattern

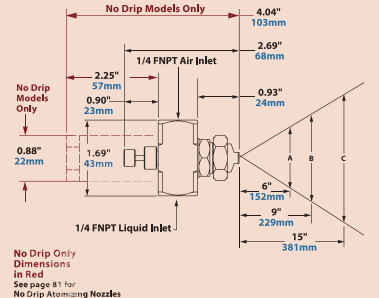

DOWNLOAD drawings at EXAIR.com

Spray Nozzles

For more information about droplet size and spray angle, see page 84.

Model	3 PSI/0.2 BAR Liquid			5 PSI/0.3 BAR Liquid			10 PSI/0.7 BAR Liquid			20 PSI/1.4 BAR Liquid			40 PSI/2.8 BAR Liquid			Spray Dimensions																						
	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	Pressure		Width			Max. Depth feet/m																	
																Air PSI/BAR	Liquid PSI/BAR	A	B	C																		
EF1010SS	5	0.3		0.8	22.7	10	0.7	1.0	28.3	15	1.0	1.3	36.8	25	1.7	1.8	51.0	45	3.1	2.7	76.5	5	0.3	3	0.2	40	10.2	5.8	14.7	9.5	24.1	6	1.8					
	10	0.7		1.0	28.3	20	1.4	1.5	42.5	25	1.7	1.8	51.0	40	2.8	2.5	70.8	60	4.1	3.4	96.3	25	1.7	5	0.3	55	14.0	8.0	20.3	10.0	25.4	12	3.7					
	20	1.4	1.0	3.8	1.5	42.5	30	2.1	2.0	56.6	40	2.8	3.4	96.3	60	4.1	4.7	133	95	6.5	5.1	144	50	3.4	20	1.4	63	16.0	9.5	24.1	13.0	33.0	13	4.0				
	40	2.8			2.5	70.8	50	3.4	2.9	82.1	60	4.1	3.4	96.3	90	6.2	4.7	133	95	6.5	5.1	144	75	5.2	40	2.8	6.5	16.5	9.5	24.1	13.0	33.0	16	4.9				
EF1020SS	10	0.7		1.0	28.3	15	1.0	1.3	36.8	20	1.4	1.5	42.5	35	2.4	2.2	62.3	50	3.4	2.9	82.1	10	0.7	3	0.2	45	11.4	7.0	17.8	11.0	27.9	9	2.7					
	20	1.4		1.5	42.5	25	1.7	1.8	51.0	30	2.1	2.0	56.6	50	3.4	2.9	82.1	60	4.1	3.4	96.3	30	2.1	5	0.3	60	15.2	10.0	25.4	14.0	35.6	14	4.3					
	30	2.1	2.5	9.5	2.0	56.6	40	2.8	2.5	70.8	50	3.4	4.3	16.3	5.9	22.3	3.8	108	80	5.5	4.3	122	35	2.4	20	1.4	6.5	16.5	11.0	27.9	16.0	40.6	17	5.2				
	50	3.4			2.9	82.1	60	4.1	3.4	96.3	70	4.8	3.8	108	90	6.2	4.7	133	100	6.9	5.2	147	75	5.2	40	2.8	7.5	19.1	11.5	29.2	18.0	45.7	20	6.1				
EF1030SS	10	0.7		3.5	99.1	20	1.4	5.3	150	25	1.7	6.1	173	40	2.8	8.4	238	50	3.4	10.0	283	10	0.7	3	0.2	60	15.2	10.0	25.4	14.0	35.6	14	4.3					
	20	1.4		5.3	150	30	2.1	6.9	195	35	2.4	7.6	215	50	3.4	10.0	283	70	4.8	11.5	326	20	1.4	4.4	16.7	6.9	19.5	40	2.8	8.4	238	50	3.4					
	30	2.1	4.4	16.7	6.9	195	40	2.8	8.4	238	50	3.4	7.6	215	5.9	22.3	11.5	326	80	5.5	11.5	326	40	2.8	11.5	326	70	4.8	11.5	326	80	5.5	11.5	326	80	5.5		
	50	3.4			11.5	326	70	4.8	11.5	326	70	4.8	12.7	360	110	6.1	14.8	419	95	6.5	15.1	428	60	4.1	14.0	53.0	13.7	388	60	4.1	20	1.4	17.8	11.0	27.9	14.0	35.6	28
EF1040SS	15	1.0		4.4	125	25	1.7	6.1	173	35	2.4	7.6	215	50	3.4	9.2	261	55	3.8	10.7	303	15	1.0	3	0.2	6.8	17.3	11.0	27.9	14.0	35.6	17	5.2					
	25	1.7		6.1	173	35	2.4	7.6	215	45	3.1	9.2	261	55	3.8	10.7	303	65	4.5	11.5	326	20	1.4	4.4	16.7	6.9	19.5	40	2.8	8.4	238	50	3.4					
	40	2.8	10.0	37.9	8.4	238	50	3.4	10.0	283	60	4.1	11.5	326	70	4.8	12.7	360	80	5.5	11.5	326	40	2.8	11.5	326	80	5.5	11.5	326	80	5.5	11.5	326	80	5.5		
	50	3.4			11.5	326	80	5.5	11.5	326	80	5.5	13.7	388	90	6.2	14.8	419	100	6.9	16.2	459	80	5.5	20	1.4	8.0	20.3	12.0	30.5	16.0	40.6	25	7.6				

Atomizing Nozzles

External Mix Wide Angle Flat Fan Pattern - 1/4 NPT

Model EB1010SS, EB1020SS, EB1030SS and EB1040SS

1/4 NPT external mix wide angle flat fan pattern nozzles are great where a high volume of liquid is needed over a wide area such as a conveyor line. Because they are external mix, airflow and liquid flow can be controlled independently. Common applications are those which require a moderate application of liquid over a broad area, such as cooling or coating wide webs.

For pressure fed applications with independent air and liquid control.



Model: EB1010SS
Material: Type 303 Stainless Steel



Model: EB1020SS
Material: Type 303 Stainless Steel



Model: EB1030SS
Material: Type 303 Stainless Steel




Model: EB1040SS
Material: Type 303 Stainless Steel



2) Model EB1040SS nozzles are used to rinse wine bottles after capping.

Dimensions and Airflow Pattern

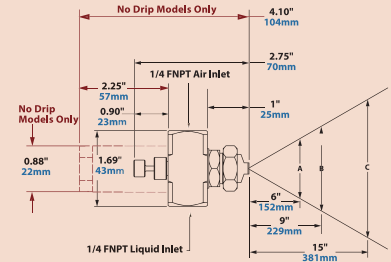

No Drip Only Dimensions in Red
See page 81 for No Drip Atomizing Nozzles

For more information about droplet size and spray angle, see page 84.

Model	3 PSI/0.2 BAR Liquid			5 PSI/0.3 BAR Liquid			10 PSI/0.7 BAR Liquid			20 PSI/1.4 BAR Liquid			40 PSI/2.8 BAR Liquid			Spray Dimensions																													
	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Pressure			Width			Max. Depth feet/m																							
	Air PSI/ BAR	Liquid PSI/ BAR	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	Air in cm	A	B	C																											
EB1010SS	5	0.3		0.9	25.5	5	0.3		0.9	25.5	8	0.6	1.1	31.1	10	0.7	1.3	36.8	15	1.0	1.7	48.1	10	0.7	5	0.3	8.0	20.3	11.0	27.9	14.0	35.6	9	2.7											
	8	0.6	1.0	3.8	1.1	31.1	10	0.7	1.3	36.8	10	0.7	1.3	36.8	20	1.4	2.0	56.6	20	1.4	2.0	56.6	20	1.4	2.0	56.6	20	1.4	2.0	56.6	20	1.4	2.0	56.6	10	48.3	11	3.4							
	10	0.7		4.8	1.3	36.8	10	0.7	1.7	48.1	20	1.4	2.0	56.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	10	50.8	13	4.0			
	15	1.0		7.2	1.7	48.1	20	1.4	2.0	56.6	30	2.1	2.6	73.6	35	2.4	3.0	85.0	35	2.4	3.0	85.0	35	2.4	3.0	85.0	35	2.4	3.0	85.0	35	2.4	3.0	85.0	35	2.4	3.0	85.0	10	53.3	14	4.3			
EB1020SS	6	0.4		1.0	28.3	6	0.4		1.0	28.3	6	0.4		1.0	28.3	10	0.7	1.3	36.8	20	1.4	2.0	56.6	8	0.6	5	0.3	11.0	27.9	16.0	40.6	19.0	48.3	8	2.4										
	7	0.5	2.5	9.5	1.1	31.1	8	0.6	1.1	31.1	10	0.7	1.3	36.8	15	1.0	1.7	48.1	15	1.0	1.7	48.1	20	1.4	2.0	56.6	20	1.4	2.0	56.6	20	1.4	2.0	56.6	20	1.4	2.0	56.6	10	53.3	11	3.4			
	8	0.6		3.2	1.1	31.1	10	0.7	1.3	36.8	10	0.7	1.3	36.8	15	1.0	1.7	48.1	15	1.0	1.7	48.1	20	1.4	2.0	56.6	20	1.4	2.0	56.6	20	1.4	2.0	56.6	20	1.4	2.0	56.6	10	53.3	11	3.4			
	10	0.7		4.8	1.3	36.8	10	0.7	1.7	48.1	20	1.4	2.0	56.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	30	2.1	2.6	73.6	10	53.3	14
EB1030SS	8	0.6		3.4	96.3	10	0.7		3.8	108	15	1.0		4.8	136	35	2.4		8.4	238	50	3.4		11.0	31.1																				
	15	1.0	4.4	16.7	4.8	136	20	1.4	5.9	167	25	1.7	6.7	190	45	3.1	10.1	286	65	4.5	10.1	286	65	4.5	10.1	286	65	4.5	10.1	286	65	4.5	10.1	286	65	4.5	10.1	286	65	4.5	10.1	286	65	4.5	
	20	1.4		19.0	5.9	167	25	1.7	6.7	190	35	2.4	7.6	215	55	3.8	11.7	311	85	5.9	11.7	311	85	5.9	11.7	311	85	5.9	11.7	311	85	5.9	11.7	311	85	5.9	11.7	311	85	5.9	11.7	311	85	5.9	
	25	1.7		24.7	6.7	190	30	2.1	7.6	215	40	2.8	9.3	263	60	4.1	12.0	340	95	6.5	12.0	340	95	6.5	12.0	340	95	6.5	12.0	340	95	6.5	12.0	340	95	6.5	12.0	340	95	6.5	12.0	340	95	6.5	
EB1040SS	10	0.7		3.8	108	15	1.0		4.8	136	25	1.7	6.7	190	45	3.1	10.1	286	75	5.2	10.1	286	75	5.2	10.1	286	75	5.2	10.1	286	75	5.2	10.1	286	75	5.2	10.1	286	75	5.2					
	15	1.0		4.8	136	20	1.4		5.9	167	30	2.1	7.6	215	50	3.4	11.0	311	85	5.9	11.0	311	85	5.9	11.0	311	85	5.9	11.0	311	85	5.9	11.0	311	85	5.9	11.0	311	85	5.9					
	20	1.4	10.0	37.9	5.9	167	30	2.1	7.6	215	40	2.8	9.3	263	70	4.8	11.7	311	95	6.5	11.7	311	95	6.5	11.7	311	95	6.5	11.7	311	95	6.5	11.7	311	95	6.5	11.7	311	95	6.5					
	25	1.7		19.0	5.9	167	35	2.4	7.6	215	45	3.1	10.1	286	80	5.5	11.7	311	100	6.9	11.7	311	100	6.9	11.7	311	100	6.9	11.7	311	100	6.9	11.7	311	100	6.9	11.7	311	100	6.9					

Siphon Fed Round Pattern - 1/4 NPT



Model SR1010SS, SR1020SS, SR1030SS and SR1040SS

1/4 NPT siphon fed round pattern nozzles are great where no liquid pressure is available and a thin coating is needed at a specific area. Flow rate is adjustable via the adjusting valve. Siphon nozzles work best with a suction height of 36" (914mm) or less. Since these nozzles are siphon fed, the compressed airflow draws the liquid in and mixes it internally. Liquid flow is dependent both on the gravity or suction height and the airflow. Siphon fed round pattern nozzles provide the most liquid flow of any siphon fed nozzle.

Siphon or gravity fed for non-pressurized applications.



Model: SR1010SS
Material: Type 303 Stainless Steel



Model: SR1020SS
Material: Type 303 Stainless Steel



Model: SR1030SS
Material: Type 303 Stainless Steel




Model: SR1040SS
Material: Type 303 Stainless Steel



The SR1020SS has a focused, round pattern for precision application of coatings or coolant.

Dimensions and Airflow Pattern

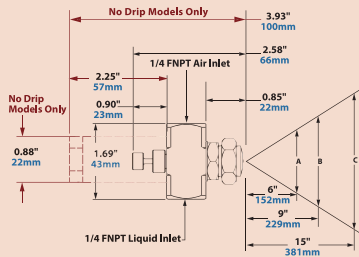

No Drip Only Dimensions In Red See page 81 for No Drip Atomizing Nozzles

For more information about droplet size and spray angle, see page 84.

Spray Nozzles

		Liquid Flow in GPH/LPH												Spray Dimensions at 8" (20cm) Siphon Height																
		Air			Gravity Head			Siphon Height						Air			Width			Max. Depth feet/m										
Model		Pressure PSI/BAR	SCFM/SLPM	18"	46cm	12"	30cm	6"	15cm	4"	10cm	8"	20cm	12"	30cm	24"	61cm	36"	91cm		Pressure PSI/BAR	A in	A cm	B in	B cm	C in	C cm			
SR1010SS	10	0.7	0.5	14.2	0.6	2.3	0.5	1.9	0.4	1.5	0.2	0.8	0.2	0.8	---	---	---	---	---	---	10	0.7	2.5	6	4.0	10	5.8	15	7	2.1
	20	1.4	0.7	19.8	0.6	2.3	0.6	2.3	0.5	1.9	0.4	1.5	0.4	1.5	0.3	1.1	---	---	---	---	20	1.4	3.3	8	4.3	11	6.0	15	9	2.7
	40	2.8	1.2	34.0	0.7	2.6	0.7	2.6	0.6	2.3	0.5	1.9	0.5	1.9	0.4	1.5	0.3	1.1	0.2	0.8	40	2.8	3.8	10	5.0	13	6.8	17	10	3.0
	60	4.1	1.6	45.3	0.8	3.0	0.8	3.0	0.7	2.6	0.6	2.3	0.5	1.9	0.5	1.9	0.4	1.5	0.2	0.8	60	4.1	3.8	10	5.0	13	6.8	17	11	3.4
SR1020SS	10	0.7	0.7	19.8	1.1	4.2	0.9	3.4	0.8	3.0	0.5	1.9	0.4	1.5	0.3	1.1	---	---	---	---	10	0.7	3.3	8	4.8	12	6.8	17	9	2.7
	20	1.4	1.1	31.1	1.3	4.9	1.1	4.2	1.0	3.8	0.8	3.0	0.7	2.6	0.6	2.3	0.3	1.1	---	---	20	1.4	3.5	9	5.0	13	7.0	18	11	3.4
	40	2.8	1.7	48.1	1.6	6.1	1.5	5.7	1.4	5.3	1.2	4.5	1.0	3.8	1.0	3.8	0.7	2.6	0.4	1.5	40	2.8	3.8	10	5.5	14	7.5	19	14	4.3
	60	4.1	2.3	65.0	1.9	7.2	1.7	6.4	1.6	6.1	1.4	5.3	1.2	4.5	1.2	4.5	0.9	3.4	0.5	1.9	60	4.1	4.0	10	5.8	15	8.0	20	16	4.9
SR1030SS	20	1.4	2.0	56.6	4.3	16.3	3.8	14.4	3.3	12.5	2.5	9.5	1.8	6.8	1.3	4.9	0.3	1.1	---	---	20	1.4	3.5	9	5.0	13	7.0	18	12	3.7
	40	2.8	3.2	90.6	5.0	18.9	4.4	16.7	4.0	15.1	3.3	12.5	2.9	11.0	2.5	9.5	1.3	4.9	1.0	3.8	40	2.8	3.8	10	5.3	13	7.5	19	13	4.0
	60	4.1	4.3	122	5.5	20.8	4.9	18.5	4.5	17.0	3.7	14.0	3.4	12.9	3.1	11.7	1.9	7.2	1.5	5.7	60	4.1	3.8	10	5.5	14	8.0	20	15	4.6
	80	5.5	5.6	158	5.8	22.0	5.3	20.1	4.9	18.5	4.1	15.5	3.9	14.8	3.7	14.0	2.6	9.8	1.7	6.4	80	5.5	4.0	10	5.8	15	8.3	21	18	5.5
SR1040SS	30	2.1	5.7	161	12.3	46.6	11.0	41.6	9.3	35.2	6.3	23.8	5.3	20.1	4.5	17.0	0.6	2.3	---	---	30	2.1	4.8	12	6.5	17	8.8	22	19	5.8
	40	2.8	6.9	195	13.0	49.2	11.8	44.7	10.0	37.9	7.3	27.6	6.5	24.6	5.5	20.8	1.5	5.7	0.3	1.1	40	2.8	5.2	13	7.0	18	9.3	24	21	6.4
	60	4.1	9.5	269	14.3	54.1	13.0	49.2	11.5	43.5	8.5	32.2	7.5	28.4	6.5	24.6	2.3	8.7	1.5	5.7	60	4.1	5.5	14	7.5	19	9.8	25	24	7.3
	80	5.5	12.0	340	15.0	56.8	13.5	51.1	12.5	47.3	9.5	36.0	8.5	32.2	7.5	28.4	3.5	13.2	1.9	7.2	80	5.5	5.8	15	7.8	20	10.0	25	27	8.2

Siphon Fed Flat Fan Pattern - 1/4 NPT



Model SF1010SS, SF1020SS and SF1030SS

1/4 NPT siphon fed flat fan pattern nozzles are great where no liquid pressure is available and a thin coating is needed over a wide band. Flow rate is adjustable via the adjusting valve. Siphon nozzles work best with a suction height of 36" (914mm) or less. Since these nozzles are siphon fed, the compressed airflow draws the liquid in and mixes it internally. Liquid flow is dependent both on the gravity or suction height and the airflow. Siphon fed flat fan pattern nozzles are the best choice where liquid is needed over a broad band such as a moving assembly line.

Siphon or gravity fed for non-pressurized applications.



Model: SF1010SS

Material: Type 303 Stainless Steel



Model: SF1020SS

Material: Type 303 Stainless Steel




Model: SF1030SS

Material: Type 303 Stainless Steel



A Model SF1020SS is used to apply a light coating of oil to prevent sockets from rusting prior to a packaging operation.

Dimensions and Airflow Pattern

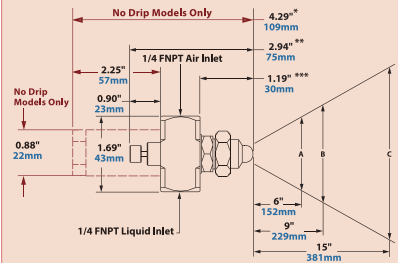

No Drop Only Dimensions in Red See page 8 for No Drop Atomizing Nozzles

**Model SF2010SS: 4.15" / 105mm
 ***Model SF1010SS: 2.80" / 71mm
 ****Model SF1010SS: 1.05" / 27mm

For more information about droplet size and spray angle, see page 84.

Model		Liquid Flow in GPH/LPH																Spray Dimensions at 8" (20cm) Siphon Height												
		Air				Gravity Head					Siphon Height							Air		Width						Max. Depth feet/m				
		Pressure PSI/BAR	SCFM/SLPM	18"	46cm	12"	30cm	6"	15cm	4"	10cm	8"	20cm	12"	30cm	24"	61cm	36"	91cm	Pressure PSI/BAR	A in cm	B in cm	C in cm	in cm	in cm		in cm			
SF1010SS	10	0.7	0.9	25.5	0.4	1.5	0.3	1.1	0.3	1.1	0.2	0.8	0.2	0.8	0.2	0.8	0.1	0.4	10	0.7	9	23	11	28	13	33	5	1.5		
	20	1.4	1.3	36.8	0.4	1.5	0.3	1.1	0.3	1.1	0.3	1.1	0.3	1.1	0.3	1.1	0.2	0.8	0.2	0.8	20	1.4	10	25	12	30	14	36	6	1.8
	30	2.1	1.7	48.1	0.3	1.1	0.3	1.1	0.3	1.1	0.3	1.1	0.3	1.1	---	---	---	---	---	---	30	2.1	11	28	13	33	15	38	7	2.1
SF1020SS	20	1.4	2.3	65.1	1.2	4.5	1.1	4.2	1.0	3.8	0.9	3.4	0.8	3.0	0.8	3.0	0.6	2.3	0.5	1.9	20	1.4	10	25	14	36	19	48	6	1.8
	30	2.1	2.9	82.1	1.1	4.2	1.1	4.2	1.0	3.8	0.8	3.0	0.8	3.0	0.8	3.0	0.6	2.3	0.5	1.9	30	2.1	11	28	15	38	21	53	7	2.1
	40	2.8	3.5	99.1	1.0	3.8	0.9	3.4	0.8	3.0	0.7	2.6	0.7	2.6	0.7	2.6	0.5	1.9	0.5	1.9	40	2.8	13	33	16	41	23	58	6	1.8
SF1030SS	50	3.4	4.3	122	0.8	3.0	0.7	2.6	0.5	1.9	0.5	1.9	0.4	1.5	0.3	1.1	---	---	---	---	50	3.4	14	36	18	46	25	64	6	1.8
	20	1.4	2.2	62.3	1.8	6.8	1.6	6.1	1.5	5.7	1.4	5.3	1.4	5.3	1.3	4.9	1.1	4.2	1.0	3.8	20	1.4	9	23	11	28	15	38	8	2.4
	30	2.1	2.8	79.2	1.9	7.2	1.8	6.8	1.8	6.8	1.7	6.4	1.7	6.4	1.6	6.1	1.4	5.3	1.2	4.5	30	2.1	10	25	13	33	17	43	9	2.7
SF1030SS	40	2.8	3.3	93.4	1.8	6.8	1.8	6.8	1.7	6.4	1.6	6.1	1.6	6.1	1.5	5.7	1.3	4.9	1.2	4.5	40	2.8	11	28	14	36	17	43	10	3.0
	50	3.4	4.0	113	1.6	6.1	1.5	5.7	1.4	5.3	1.4	5.3	1.3	4.9	1.3	4.9	1.1	4.2	1.0	3.8	50	3.4	11	28	14	36	18	46	11	3.4

Internal Mix Narrow Angle Round Pattern - 1/2 NPT

Model AN5010SS and AN5020SS

1/2 NPT internal mix narrow angle round pattern nozzles are excellent for spraying a concentrated mist of liquid. Because of the versatility of their adjustments, these larger atomizing nozzles can apply a heavy coat up close or send a very fine mist over 40 feet away! They are often used for higher volume application of lubricants during assembly, or marking items as they move through an assembly line.


For pressure fed applications not requiring independent air and liquid control.



Model: AN5010SS
Material: Type 303 Stainless Steel




Model: AN5020SS
Material: Type 303 Stainless Steel

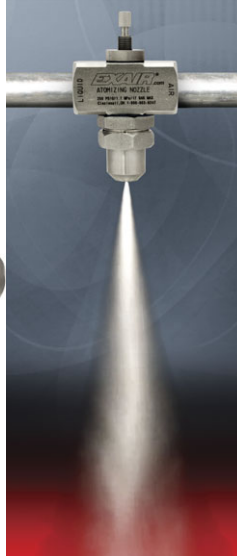

Dimensions and Airflow Pattern

DOWNLOAD drawings at EXAIR.com

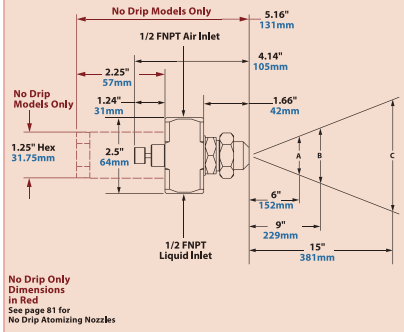

For more information about droplet size and spray angle, see page 84.

For more information about droplet size and spray angle see page 84.

With adjustable liquid flow, these nozzles can be used to apply a heavy coat or a precise volume of liquid.

Model		Spray Dimensions										Max. Depth feet/m		
		Pressure				Width								
		Air PSI/BAR	Liquid PSI/BAR	in		cm		in		cm				
AN5010SS	20	1.4	5	0.3	3.5		9		5.75		14.6		22	6.7
	36	2.5	15	1.0	3.5		9		5.75		14.6		30	9.1
	50	3.4	25	1.7	3.5		9		5.75		14.6		34	10.4
	60	4.1	35	2.4	3.5		9		5.75		14.6		37	11.3
AN5020SS	10	0.7	5	0.3	4	10	6	15.2	8.5	22	20	6.1	6.1	
	32	2.2	25	1.7	5.5	14	7.5	19.1	10	25	27	8.2	8.2	
	44	3.0	35	2.4	6	15	9	22.9	10.5	27	35	10.7	10.7	
	64	4.4	55	3.8	6	15	9	22.9	10.5	27	42	12.8	12.8	

Model	5 PSI/0.3 BAR Liquid				15 PSI/1.0 BAR Liquid				25 PSI/1.7 BAR Liquid				35 PSI/2.4 BAR Liquid				55 PSI/3.8 BAR Liquid																							
	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM		Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM		Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM		Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM		Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM																					
AN5010SS	18	1.2	9	34.1	12	339.8			28	1.9	27	102.2	14.5	411			38	2.6	51.6	195.3	16.4	464			48	3.3	75.6	286	18.4	521			60	4.1	36.6	139	25.3	716		
	22	1.5	6	26.5	12.8	362.5			32	2.2	20	75.7	16.2	459			44	3.0	32.4	122.6	19.5	552			54	3.7	22	83.3	24.3	688			72	5.0	21.6	82	31.0	878		
	24	1.7	4.5	17.0	13.6	385.2			38	2.6	20	75.7	19	538			54	3.7	22	83.3	24.3	688			78	5.4	16.8	64	33.7	954										
AN5020SS	10	0.7	30	113.6	13.7	388.0			18	1.2	98.4	372.4	15.6	442			26	1.8	159	601.8	17.6	498			36	2.5	183	693	20.0	566			54	3.7	231	874.3	26.0	736		
	12	0.8	18.6	70.4	16.2	458.8			20	1.4	73.2	277.1	17.9	507			32	2.2	99	374.7	23.7	671			42	2.9	126	477	26.1	739			60	4.1	168	635.9	33.4	946		
	---	---	---	---	---	---			22	1.5	63.6	240.7	20.3	575			36	2.5	75	283.9	28.6	810			46	3.2	96	363	31.0	878			72	5.0	76	287.7	47.2	1337		
---	---	---	---	---	---			24	1.7	52.8	199.8	22.6	640			40	2.8	57.6	218.0	33.0	935			52	3.6	71	269	37.7	1068			76	5.2	54	204.4	51.3	1453			

Internal Mix Flat Fan Pattern - 1/2 NPT

Model AF5010SS and AF5020SS

1/2 NPT internal mix flat fan pattern atomizing nozzles are designed with efficiency in mind. Especially good for vertical or horizontal assembly lines, the broad thin pattern of these larger atomizing nozzles makes efficient use of your expensive liquids. Their output can be adjusted for a very light film or a heavy coat of atomized liquid. Whether it's applying paint to hanging sheet metal, or using a water mist to cool a laminate web, flat fan atomizing nozzles cover a wide flat area, ideal for products moving on a conveyor.


For pressure fed applications not requiring independent air and liquid control.



Model: AF5010SS
Material: Type 303 Stainless Steel




Model: AF5020SS
Material: Type 303 Stainless Steel



Use the adjustable liquid valve to apply just the right amount of liquid upon your application.

Dimensions and Airflow Pattern

DOWNLOAD drawings at EXAIR.com

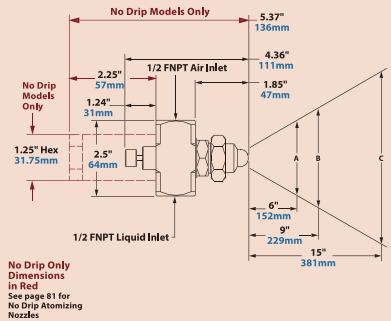

For more information about droplet size and spray angle, see page 84.

Need Help Choosing The Best Atomizing Nozzle For Your Application?

Not sure which atomizing nozzle is required?

Our Application Engineers can assist you in determining the correct model.

Call 1-800-903-9247 to speak with an Application Engineer.

Model		Spray Dimensions											Max. Depth feet/m
		Pressure					Width						
		Air PSI/BAR	Liquid PSI/BAR	A	B	C	A	B	C				
AF5010SS	20	1.4	10	0.7	25	64	34	86	45	114	14	4.3	
	40	2.8	20	1.4	28	71	36	91	46	117	18	5.5	
	50	3.4	25	1.7	29	74	38	97	48	122	22	6.7	
	70	4.8	40	2.8	32	81	42	107	51	130	27	8.2	
AF5020SS	10	0.7	5	0.3	21	53	27	69	36	91	13	4.0	
	20	1.4	15	1.0	34	86	42	107	52	132	15	4.6	
	44	3.0	35	2.4	39	99	47	119	64	163	19	5.8	
	64	4.4	55	3.8	40	102	50	127	68	173	20	6.1	

Model	5 PSI/0.3 BAR Liquid				15 PSI/1.0 BAR Liquid				25 PSI/1.7 BAR Liquid				35 PSI/2.4 BAR Liquid				55 PSI/3.8 BAR Liquid													
	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	SCFM/SLPM	Air Pressure PSI/BAR	GPH/LPH	SCFM/SLPM	SCFM/SLPM										
AF5010SS	---	---	---	---	28	1.9	33.6	127	23.4	663	44	3.0	38.4	145	32.4	918	58	4.0	46.2	175	40.3	1141	---	---	---	---				
	---	---	---	---	30	2.1	25.2	95	25.3	716	48	3.3	35.8	136	36.2	1025	62	4.3	34.8	132	43.5	1232	---	---	---	---				
	---	---	---	---	34	2.3	12.6	48	28.7	813	50	3.4	18	68	38.0	1076	65	4.5	25.2	95	46.0	1303	---	---	---	---				
	---	---	---	---	36	2.5	11.5	44	31.2	884	60	4.1	3.5	13	46.0	1303	70	4.8	16.2	61	49.7	1408	---	---	---	---				
AF5020SS	10	0.69	18	68	180	510	18	1.2	87.6	332	15.6	442	26	1.8	150	568	179	507	36	2.5	177	670	22.3	632	54	3.7	231	874	29.3	830
	12	0.83	6	23	6.0	170	20	1.4	62.4	236	18.4	521	30	2.1	99	375	22.3	632	40	2.8	132	500	26.6	753	60	4.1	186	704	35.6	1008
	---	---	---	---	---	---	22	1.5	45.6	173	20.6	583	36	2.5	50.4	191	29.9	847	46	3.2	76.8	291	34.4	974	68	4.7	108	409	44.4	1257
	---	---	---	---	---	---	24	1.7	30.6	116	23.3	660	40	2.8	26.4	100	35.2	997	52	3.6	38.4	145	41.5	1175	76	5.2	66	250	53.13	1505

Atomizing Nozzles

Internal Mix 360° Hollow Circular Pattern - 1/2 NPT




Model: AT5010SS
Material: Type 303 Stainless Steel

Model AT5010SS


1/2 NPT internal mix 360° nozzles are designed for applications where the spray pattern must be oriented away from the nozzle in all directions. These larger 360° nozzles are ideal where a smooth, even coating is needed on the ID of pipe or similar ductwork. They also work great for operations where a mist over a broad area is needed, such as dust suppression, humidification and cooling.

For pressure fed applications not requiring independent air and liquid control.

Dimensions and Airflow Pattern

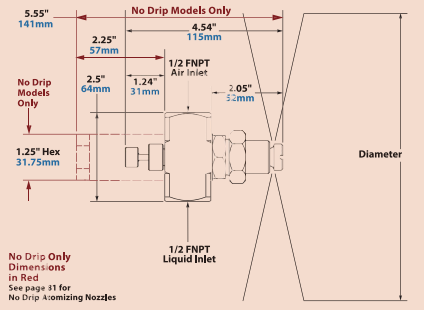

For more information about droplet size and spray angle, see page 84.

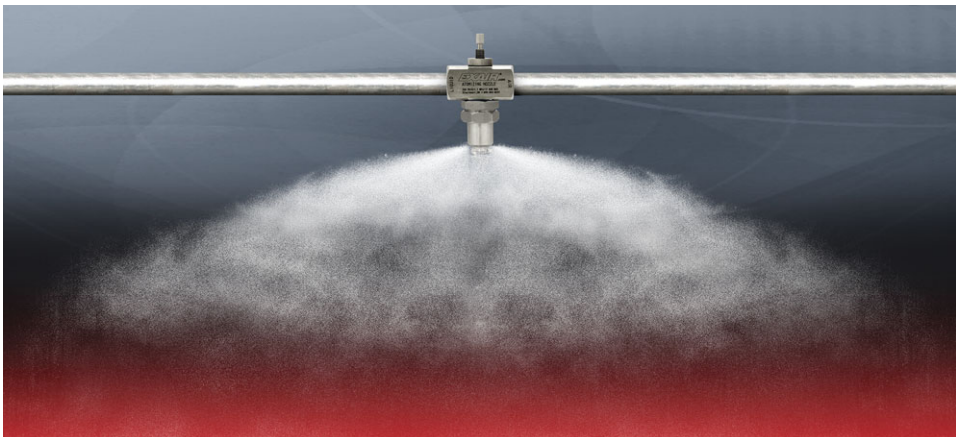

360° circular pattern nozzles can be used to coat inside diameters or cover a broad area up to 13' (4m).

Model	10 PSI/0.7 BAR Liquid					20 PSI/1.4 BAR Liquid					30 PSI/2.1 BAR Liquid					40 PSI/2.8 BAR Liquid					60 PSI/4.1 BAR Liquid					Spray Dimensions										
	Air Pressure	GPH/LPH	SCFM/SLPM	Air Pressure	GPH/LPH	SCFM/SLPM	Air Pressure	GPH/LPH	SCFM/SLPM	Air Pressure	GPH/LPH	SCFM/SLPM	Air Pressure	GPH/LPH	SCFM/SLPM	Air Pressure	GPH/LPH	SCFM/SLPM	Pressure	Liquid	Diameter															
	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	PSI/BAR	in	cm														
AT5010SS	14	1.0	54	204	13.7	388	24	1.7	100	379	17.3	490	36	2.5	114	431	23.7	671	48	3.3	132	500	29.6	838	72	5.0	150	568	41.5	1175	16	1.1	10	0.7	56	142
	16	1.1	33.6	127	16.3	462	28	1.9	66	250	21.8	617	40	2.8	83	314	28.0	793	54	3.7	85	322	36.2	1025	76	5.2	120	454	45.6	1291	42	2.9	30	2.1	112	284
	18	1.2	16.8	64	18.5	524	32	2.2	32.5	123	26.7	756	46	3.2	38.4	145	34.6	980	60	4.1	42	159	42.7	1209	78	5.4	108	409	47.9	1357	56	3.9	40	2.8	144	366
	20	1.4	10.8	41	20.0	566	36	2.5	12	45	30.8	872	50	3.4	14.4	55	39.1	1107	66	4.6	15.6	59	49.9	1413	82	5.7	84	318	51.5	1458	80	5.5	60	4.1	156	396

External Mix Narrow Angle Flat Fan Pattern - 1/2 NPT



Model: EF501055
Material: Type 303 Stainless Steel

Model EF501055

1/2 NPT external mix narrow angle flat fan pattern nozzles are great where a high volume of liquid is needed over a concentrated area. Since they are external mix, airflow and liquid flow can be controlled independently. External mix narrow angle flat fan pattern nozzles are the best choice where thicker liquids for a heavy coating are needed over a narrow band, such as a paint line.

For pressure fed applications with independent air and liquid control.



External mix narrow angle flat fan nozzles provide a high volume of liquid in a concentrated area.


Spray Nozzles

Mounting Brackets For Your Atomizing System



EXAIR's Model 901556 Mounting Bracket allows for easy positioning of all EXAIR 1/2 NPT Atomizing Nozzles.

Dimensions and Airflow Pattern

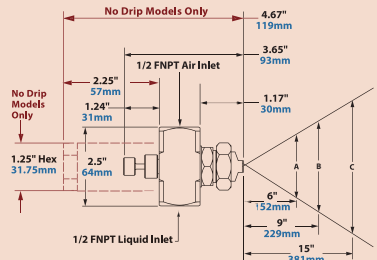


No Drip Only Dimensions in Red
See page 81 for No Drip Atomizing Nozzles

For more information about droplet size and spray angle, see page 84.

Model	3 PSI/0.2 BAR Liquid			5 PSI/0.3 BAR Liquid			7 PSI/0.5 BAR Liquid			10 PSI/0.7 BAR Liquid			15 PSI/1.0 BAR Liquid			Spray Dimensions																															
	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Air Pressure PSI/ BAR	GPH/ LPH	SCFM/ SLPM	Pressure			Width		Max. Depth feet/m																										
	Air PSI/ BAR	LPH	SLPM	Air PSI/ BAR	LPH	SLPM	Air PSI/ BAR	LPH	SLPM	Air PSI/ BAR	LPH	SLPM	Air PSI/ BAR	LPH	SLPM	Air PSI/ BAR	Liquid PSI/ BAR	A	B	C																											
EF501055	30	2.1		30.2	854		40	2.8		36.6	1037		45	3.1		218	825		39.9	1130		55	3.8		46.4	1314		80	5.5		56.0	1586	35	2.4	3	0.2	15	38	18.5	47	22	56	25	7.6			
	35	2.4		34.0	961		45	3.1		40.4	1144		55	3.8		47.0	1331		60	4.1		264	999		49.75	1409		85	5.9		60.0	1699	50	3.4	5	0.3	15	38	19	48	23	58	31	9.4			
	40	2.8	141	534		37.3	1055		55	3.8		47.4	1342		60	4.1		49.5	1402		70	4.8				52.84	1496		90	6.2		61.4	1739	70	4.8	10	0.7	15	38	20	51	25	64	33	10.1		
	45	3.1		40.8	1155		60	4.1		50.0	1416		70	4.8		56.8	1609		80	5.5						59.7	1691		100	6.9		67.6	1914	90	6.2	15	38	20	51	25	64	35	10.7				

Siphon Fed Round Pattern - 1/2 NPT



Model: SR5010SS
Material: Type 303 Stainless Steel

Model SR5010SS

1/2 NPT siphon fed round pattern nozzles are great where no liquid pressure is available and a heavy coating is needed at a specific area. Flow rate of these larger atomizing nozzles is adjustable via the adjusting valve. Siphon nozzles work best with a suction height of 24" or less. Since these nozzles are siphon fed, the compressed airflow draws the liquid in and mixes it internally. Liquid flow is dependent both on the gravity or suction height and the airflow. 1/2 NPT siphon fed round pattern nozzles provide the most liquid flow of any siphon fed nozzle.

Siphon or gravity fed for non-pressurized applications.



Use a siphon fed nozzle when no liquid pressure is available.


Siphon Nozzles

Air and Liquid Caps are Interchangeable!



Changing liquid volume and/or liquid air pattern can be done in the field. EXAIR's vast selection of caps are all interchangeable!

Dimensions and Airflow Pattern

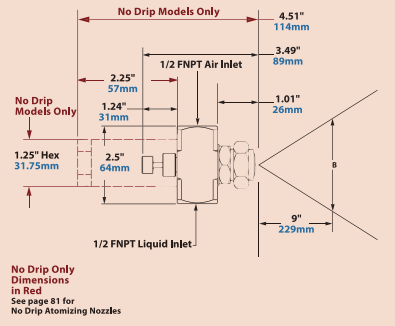

For more information about droplet size and spray angle, see page 84.

Model	Liquid Flow in GPH/LPH															Spray Dimensions at 8" (20cm) Siphon Height						
	Air			Gravity Head					Siphon Height							Air		Width		Max. Depth feet/m		
	Pressure PSI/BAR	SCFM/SLPM		18"	46cm	12"	30cm	6"	15cm	4"	10cm	8"	20cm	12"	30cm	24"	61cm	Pressure PSI/BAR	B			
SR5010SS	20	1.4	19.3	547	---	---	---	---	---	22.1	84	14.3	54	---	---	---	---	20	1.4	22	6.7	
	30	2.1	25.2	714	---	---	---	---	---	28.6	108	25.7	97	12.3	47	---	---	30	2.1	25	7.6	
	40	2.8	32.8	929	---	---	56.8	215	41	155	31.5	119	28.4	107	19.6	74	---	40	2.8	28	8.5	
	50	3.4	36.7	1039	61	231	57.4	217	42.8	162	32.1	121	30.2	114	21.8	83	---	50	3.4	29	8.8	
	60	4.1	42.2	1195	59.1	224	57.4	217	43.8	166	33.1	125	33	125	25.7	97	9.9	37	60	4.1	31	9.4
	70	4.8	47.7	1351	66	250	58.6	222	43.8	166	35.3	134	35.3	134	29.7	112	12.5	47	70	4.8	35	10.7
	80	5.5	52.9	1498	68.3	259	59.1	224	44.5	168	44.6	169	36.9	140	31.5	119	17.5	66	80	5.5	37	11.3



No Drip Atomizing Spray Nozzles

Eliminate drips to conserve valuable liquids and improve product finishes!



What Are No Drip Atomizing Nozzles?

EXAIR's patented⁷ no drip atomizing spray nozzles work in the same way our standard atomizing nozzles do, but have the added benefit of positively stopping liquid flow when compressed air is shut off. All models use stainless steel construction for durability and corrosion resistance.

EXAIR's no drip atomizing nozzles are available in 3 basic families:

Internal Mix:

Internal mix nozzles mix the liquid and water inside the air cap and produce the finest atomization. Internal mix nozzles can be used on liquids with a viscosity up to 300 cP. Both air and liquid sides are pressure fed. **No Drip Internal Mix Atomizing Nozzles are for pressure fed applications not requiring independent air and liquid control.**

External Mix:

External mix nozzles have the highest flow rates and allow the air and liquid flows to be adjusted independently. These nozzles are best where precise liquid flow is needed. External mix nozzles can be used on liquids with a viscosity above 300 cP. Both air and liquid sides are pressure fed. **No Drip External Mix Atomizing Nozzles are for pressure fed applications with independent air and liquid control.**

Siphon Fed:

Siphon fed nozzles require no liquid pressure and can be used with gravity fed liquids or lift liquids from a siphon height as much as 36 inches (91cm). Siphon fed nozzles can be used on liquids with a viscosity up to 200 cP. **No Drip Siphon Fed Atomizing Nozzles are siphon or gravity fed for non-pressurized applications.**

⁷ Patent #9156045

Why No Drip Atomizing Nozzles?

When spraying any type of liquid, post spray liquid flow can cause big problems. Unwanted drips can ruin product finishes on painted or coated surfaces. In addition, excess liquid flow wastes precious resources such as expensive coatings, chemicals or water. EXAIR's no drip atomizing nozzles are ideal where no post-spray drip is permissible. When the compressed air supply is shut off, the no drip nozzle positively seals off the flow of liquid eliminating the possibility of drips. They can be used in any situation that our standard atomizing nozzles can be used, including Siphon Fed applications. Unlike some manufacturers, there's no need to run a separate air line to control the no drip mechanism. The same compressed air used to combine and atomize liquid in a variety of patterns is used to open a valve allowing liquid to flow. That makes these ideal for use with EXAIR's money and energy saving EFC (see page 7).

EXAIR's no drip nozzles do not change flow rates from standard atomizing nozzles. Operations that require up to 180 cycles per minute can be achieved. Minimum operating air pressure of 30 PSIG (2.1 BAR) required.



Mounting Brackets are available - Model 901318 for 1/4 NPT and Model 901556 for 1/2 NPT atomizing nozzles.

Applications

- Painting
- Coating
- Rinsing
- Cooling
- Quenching
- Wetting (moistening)
- Humidification
- Dust Control

Advantages

- No post spray drip
- Adjustable
- Easily used with an EFC
- Minimizes air and liquid consumption
- All stainless steel construction
- Fine atomization
- Interchangeable liquid and air caps
- Compact

No Drip Atomizing Nozzles



No Drip Internal Mix Atomizing Nozzles are for pressure fed applications not requiring independent air and liquid control.



Spray Nozzles

NO DRIP INTERNAL MIX ATOMIZING NOZZLES

Model	Description
-------	-------------

No Drip Internal Mix Narrow Angle Round Pattern Atomizing Nozzles

AN2010SS	No Drip Internal Mix Narrow Angle Round Pattern Atomizing Nozzles, 3.3 GPH/12.5 LPH Max, 1/4 NPT
AN2020SS	No Drip Internal Mix Narrow Angle Round Pattern Atomizing Nozzles, 9.9 GPH/37.5 LPH Max, 1/4 NPT
AN2030SS	No Drip Internal Mix Narrow Angle Round Pattern Atomizing Nozzles, 23.0 GPH/87.1 LPH Max, 1/4 NPT
AN2040SS	No Drip Internal Mix Narrow Angle Round Pattern Atomizing Nozzles, 66.0 GPH/250 LPH Max, 1/4 NPT
AN6010SS	No Drip Internal Mix Narrow Angle Round Pattern Atomizing Nozzles, 75.6 GPH/286 LPH Max, 1/2 NPT
AN6020SS	No Drip Internal Mix Narrow Angle Round Pattern Atomizing Nozzles, 231.0 GPH/874 LPH Max, 1/2 NPT

No Drip Internal Mix Wide Angle Round Pattern Atomizing Nozzles

AW2010SS	No Drip Internal Mix Wide Angle Round Pattern Atomizing Nozzles, 3.5 GPH/13.2 LPH Max, 1/4 NPT
AW2020SS	No Drip Internal Mix Wide Angle Round Pattern Atomizing Nozzles, 8.5 GPH/32.2 LPH Max, 1/4 NPT
AW2030SS	No Drip Internal Mix Wide Angle Round Pattern Atomizing Nozzles, 15.0 GPH/56.8 LPH Max, 1/4 NPT
AW2040SS	No Drip Internal Mix Wide Angle Round Pattern Atomizing Nozzles, 24.0 GPH/91 LPH Max, 1/4 NPT
AW6010SS	No Drip Internal Mix Wide Angle Round Pattern Atomizing Nozzles, 66.0 GPH/250 LPH Max, 1/2 NPT
AW6020SS	No Drip Internal Mix Wide Angle Round Pattern Atomizing Nozzles, 115.0 GPH/435 LPH Max, 1/2 NPT
AW6030SS	No Drip Internal Mix Wide Angle Round Pattern Atomizing Nozzles, 264.0 GPH/999 LPH Max, 1/2 NPT

No Drip Internal Mix Flat Fan Pattern Atomizing Nozzles

AF2010SS	No Drip Internal Mix Flat Fan Pattern Atomizing Nozzles, 3.2 GPH/12.1 LPH Max, 1/4 NPT
AF2020SS	No Drip Internal Mix Flat Fan Pattern Atomizing Nozzles, 4.7 GPH/17.8 LPH Max, 1/4 NPT
AF2030SS	No Drip Internal Mix Flat Fan Pattern Atomizing Nozzles, 11.0 GPH/41.6 LPH Max, 1/4 NPT
AF2040SS	No Drip Internal Mix Flat Fan Pattern Atomizing Nozzles, 18.3 GPH/69.3 LPH Max, 1/4 NPT
AF2050SS	No Drip Internal Mix Flat Fan Pattern Atomizing Nozzles, 42.0 GPH/159 LPH Max, 1/4 NPT
AF6010SS	No Drip Internal Mix Flat Fan Pattern Atomizing Nozzles, 46.2 GPH/175 LPH Max, 1/2 NPT
AF6020SS	No Drip Internal Mix Flat Fan Pattern Atomizing Nozzles, 231.0 GPH/874 LPH Max, 1/2 NPT

No Drip Internal Mix Deflected Flat Fan Pattern Atomizing Nozzles

AD2010SS	No Drip Internal Mix Deflected Flat Fan Pattern Atomizing Nozzles, 6.9 GPH/26 LPH Max, 1/4 NPT
----------	--

No Drip Internal Mix 360° Hollow Circular Pattern Atomizing Nozzles

AT2010SS	No Drip Internal Mix 360° Hollow Circular Pattern Atomizing Nozzles, 14.7 GPH/55.7 LPH Max, 1/4 NPT
AT6010SS	No Drip Internal Mix 360° Hollow Circular Pattern Atomizing Nozzles, 150 GPH/568 LPH Max, 1/2 NPT

No Drip External Mix Atomizing Nozzles are for pressure fed applications with independent air and liquid control.



No Drip Siphon Fed Atomizing Nozzles are siphon or gravity fed for non-pressure fed applications.



NO DRIP EXTERNAL MIX ATOMIZING NOZZLES

NO DRIP SIPHON FED ATOMIZING NOZZLES

Model	Description
No Drip External Mix Round Pattern Atomizing Nozzles	
ER2010SS	No Drip External Mix Round Pattern Atomizing Nozzles, 3.8 GPH/14.4 LPH Max, 1/4 NPT
ER2020SS	No Drip External Mix Round Pattern Atomizing Nozzles, 7.5 GPH/28.4 LPH Max, 1/4 NPT
ER2030SS	No Drip External Mix Round Pattern Atomizing Nozzles, 14.0 GPH/53.0 LPH Max, 1/4 NPT
ER2040SS	No Drip External Mix Round Pattern Atomizing Nozzles, 31.0 GPH/117 LPH Max, 1/4 NPT
ER2050SS	No Drip External Mix Round Pattern Atomizing Nozzles, 60.0 GPH/227 LPH Max, 1/4 NPT
No Drip External Mix Narrow Angle Flat Fan Pattern Atomizing Nozzles	
EF2010SS	No Drip External Mix Narrow Angle Flat Fan Pattern Atomizing Nozzles, 3.8 GPH/14.4 LPH Max, 1/4 NPT
EF2020SS	No Drip External Mix Narrow Angle Flat Fan Pattern Atomizing Nozzles, 7.5 GPH/28.4 LPH Max, 1/4 NPT
EF2030SS	No Drip External Mix Narrow Angle Flat Fan Pattern Atomizing Nozzles, 14.0 GPH/53.0 LPH Max, 1/4 NPT
EF2040SS	No Drip External Mix Narrow Angle Flat Fan Pattern Atomizing Nozzles, 31.0 GPH/117 LPH Max, 1/4 NPT
EF6010SS	No Drip External Mix Narrow Angle Flat Fan Pattern Atomizing Nozzles, 303.0 GPH/1,147 LPH Max, 1/2 NPT
No Drip External Mix Wide Angle Flat Fan Pattern Atomizing Nozzles	
EB2010SS	No Drip External Mix Wide Angle Flat Fan Pattern Atomizing Nozzles, 3.8 GPH/14.4 LPH Max, 1/4 NPT
EB2020SS	No Drip External Mix Wide Angle Flat Fan Pattern Atomizing Nozzles, 7.5 GPH/28.4 LPH Max, 1/4 NPT
EB2030SS	No Drip External Mix Wide Angle Flat Fan Pattern Atomizing Nozzles, 14.0 GPH/53.0 LPH Max, 1/4 NPT
EB2040SS	No Drip External Mix Wide Angle Flat Fan Pattern Atomizing Nozzles, 31.0 GPH/117 LPH Max, 1/4 NPT
No Drip Siphon Fed Round Pattern Atomizing Nozzles	
SR2010SS	No Drip Siphon Fed Round Pattern Atomizing Nozzles, 0.8 GPH/3.0 LPH Max, 1/4 NPT
SR2020SS	No Drip Siphon Fed Round Pattern Atomizing Nozzles, 1.9 GPH/7.2 LPH Max, 1/4 NPT
SR2030SS	No Drip Siphon Fed Round Pattern Atomizing Nozzles, 5.8 GPH/22.0 LPH Max, 1/4 NPT
SR2040SS	No Drip Siphon Fed Round Pattern Atomizing Nozzles, 15.0 GPH/56.8 LPH Max, 1/4 NPT
SR6010SS	No Drip Siphon Fed Round Pattern Atomizing Nozzles, 68.3 GPH/259 LPH Max, 1/2 NPT
No Drip Siphon Fed Flat Fan Pattern Atomizing Nozzles	
SF2010SS	No Drip Siphon Fed Flat Fan Pattern Atomizing Nozzles, 0.4 GPH/1.5 LPH Max, 1/4 NPT
SF2020SS	No Drip Siphon Fed Flat Fan Pattern Atomizing Nozzles, 1.2 GPH/4.5 LPH Max, 1/4 NPT
SF2030SS	No Drip Siphon Fed Flat Fan Pattern Atomizing Nozzles, 1.9 GPH/7.2 LPH Max, 1/4 NPT

Spray Nozzles

